

Ref. **8950**

HERRAMIENTA TORNEADO PLACA SOLDADA RANURADO INTERIOR



Internal Undercutting Brazed Turning Tool

Outil de tour plaquette soudé rainurage interieur



DIN
263

ISO
11

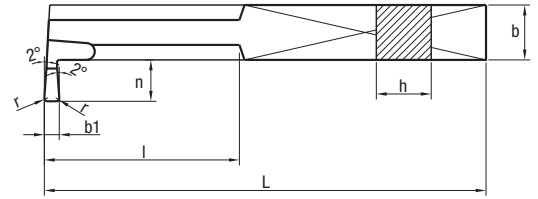

P P.1 - P.2 Aceros
P.3 - P.5 Steels
Aciers

M INOX
Stainless Steel
Acier INOX

K Fundición
Cast Iron
Fonte

K Fundición
Cast Iron
Fonte

N N.1 - N.2 Cobre / Copper / Cuivre
N.3 - N.4 Aluminio / Aluminium
N.5


| h mm | b mm | L mm | n mm | r mm | b1 mm | D min. mm | Calidad Quality / Qualité P-20 | | Calidad Quality / Qualité K-10 | |
|---------|---------|---------|---------|---------|----------|-----------------|--------------------------------------|-------|--------------------------------------|-------|
| | | | | | | | N° Art. | € | N° Art. | € |
| 12 | x 12 | x 180 | 10 | 0,2 | 4 | 32 | 38405 | 19,05 | 38407 | 19,05 |
| 16 | x 16 | x 210 | 12 | 0,2 | 5 | 40 | 38409 | 23,81 | 38411 | 23,81 |
| 20 | x 20 | x 250 | 16 | 0,4 | 6 | 50 | 38413 | 30,06 | 38415 | 30,06 |
| 25 | x 25 | x 300 | 20 | 0,4 | 8 | 63 | 38417 | 37,78 | 38419 | 37,78 |

Ref. **8960**

HERRAMIENTA TORNEADO PLACA SOLDADA ROSCADO EXTERIOR


External Threading Brazed Turning Tool

Outil de tour plaquette soudé taraudage exterior



DIN
282

ISO
12

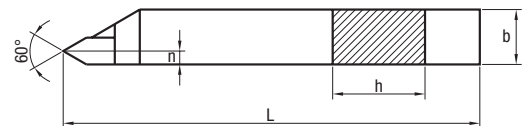

P P.1 - P.2 Aceros
P.3 - P.5 Steels
Aciers

M INOX
Stainless Steel
Acier INOX

K Fundición
Cast Iron
Fonte

K Fundición
Cast Iron
Fonte

N N.1 - N.2 Cobre / Copper / Cuivre
N.3 - N.4 Aluminio / Aluminium
N.5

| h mm | b mm | L mm | R/L | n mm | Calidad Quality / Qualité P-20 | | Calidad Quality / Qualité K-10 | |
|---------|---------|---------|-----|---------|--------------------------------------|-------|--------------------------------------|-------|
| | | | | | N° Art. | € | N° Art. | € |
| 16 | x 10 | x 110 | - L | 2,0 | 38422 | 10,58 | 38424 | 10,58 |
| 16 | x 10 | x 110 | - R | 2,0 | 38421 | 10,58 | 38423 | 10,58 |
| 20 | x 12 | x 125 | - L | 2,5 | 38426 | 12,40 | 38428 | 12,40 |
| 20 | x 12 | x 125 | - R | 2,5 | 38425 | 12,40 | 38427 | 12,40 |
| 25 | x 16 | x 140 | - L | 3,0 | 38430 | 16,14 | 38432 | 16,14 |
| 25 | x 16 | x 140 | - R | 3,0 | 38429 | 16,14 | 38431 | 16,14 |