

## Specification

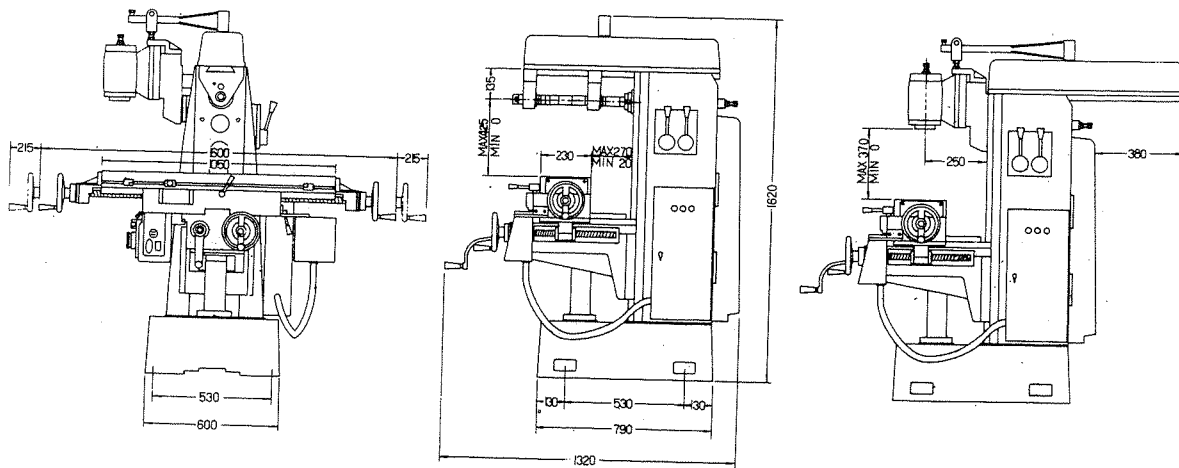


TABLE (All Specifications are based on 60Hz power supply)

Working surface	230 x 1050mm
Longitudinal travel	650mm
Cross travel	250mm
Vertical travel	450mm
T-slots (Size x no x Distance)	14 x 3 x 50mm
Longitudinal feeds (12 steps)	22-450mm/min

# DAH LIH DL H1500

### HORIZONTAL MAIN SPINDLE

Spindle speeds (6 steps)	55-1220r.p.m
Tapper of spindle nose	N.S.T # 40
Distance of spindle center to table top	0-425mm
Distance of spindle center to overarm bottom	135mm

### VERTICAL ATTACHMENT

Spindle speeds	Same as Horizontal spindle
Taper of spindle nose	N.S.T # 40
Swivelling angle (L&R)	90°
Distance of spindle nose to table top	0-370mm
Distance of spindle center to column surface	250mm

### MOTORS

Horizontal spindle	1.5KW-4p
Longitudinal feed	0.75KW-4P/0.4KW-8P
Coolant pump	100W-2P
Net weight	1,500Kg
Gross weight	1,800Kg