




Ref. **8230**

PORTA-PLAQUITAS FRESADO S45SE12F-45°

S45SE12F-45° Milling Tool-Holder


Porte-Plaquettes Fraisage S45SE12F-45°



ISO	D	dH7	L	D ₁	Z	N° Art.	€			
050R-S45SE12F	50	22	40	62	4	20566		Ref. 8804	Ref. 8804	Ref. 8801
063R-S45SE12F	63	22	50	75	5	20567				
080R-S45SE12F	80	27	50	92	6	20596				
100R-S45SE12F	100	32	50	112	6	20600				
125R-S45SE12F	125	40	63	132	7	20607				

Tipo Mecanizado Machining Type - Type d'Usage		

Plaquita / Insert / Plaque: Pag. 481, 482

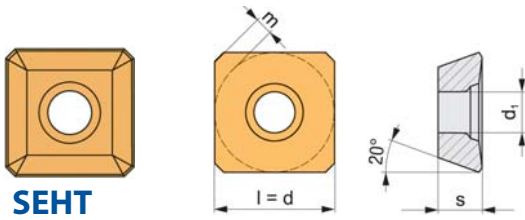

	Tornillo - Screw - Vis
	Tornillo - Screw - Vis
	Destornillador - Screwdriver - Tournevis

ISO	Calidades / Qualities / Qualités								Dimensiones / Dimensions					
	C-526	P-605	P610	P-615	P-620	P-625	P-630	P-640	P-010	l	d	s	d ₁	m _ε
SEHT 1204AFSN	■				■			■		12,70	12,70	4,76	5,50	1,6
SEHT 1204AFFN-FA			■						■	12,70	12,70	4,76	5,50	1,6

Plaquita / Insert / Plaque: Pag. 481, 482

SEHT FA

Foto Picture Photo

Grupo Materiales
Pieza Trabajo
Workpiece
Material Group
Groupe Matériaux
Pièce Travail

Fresado Milling Fraisage	P	M	K	S	N	H
Acabado Finishing Finition						■
Desb. Medio Rough. & Finish. Semi-Finition						■
Desb. Grueso Coarse Rough. Ébauche						■

Condiciones Corte
Cutting Conditions
Conditions Coupe

f_z 0,10-0,30 mm/z
a_p 1,00-6,00 mm

Filo Corte
Cutting Edge
Arête Coupe

SEHT

Foto Picture Photo

Grupo Materiales
Pieza Trabajo
Workpiece
Material Group
Groupe Matériaux
Pièce Travail

Fresado Milling Fraisage	P	M	K	S	N	H
Acabado Finishing Finition						■
Desb. Medio Rough. & Finish. Semi-Finition						■
Desb. Grueso Coarse Rough. Ébauche						■

Condiciones Corte
Cutting Conditions
Conditions Coupe

f_z 0,10-0,30 mm/z
a_p 1,00-6,00 mm

Filo Corte
Cutting Edge
Arête Coupe